


# LINED TAPER DIP PIPE & DIP PIPE SPARGER

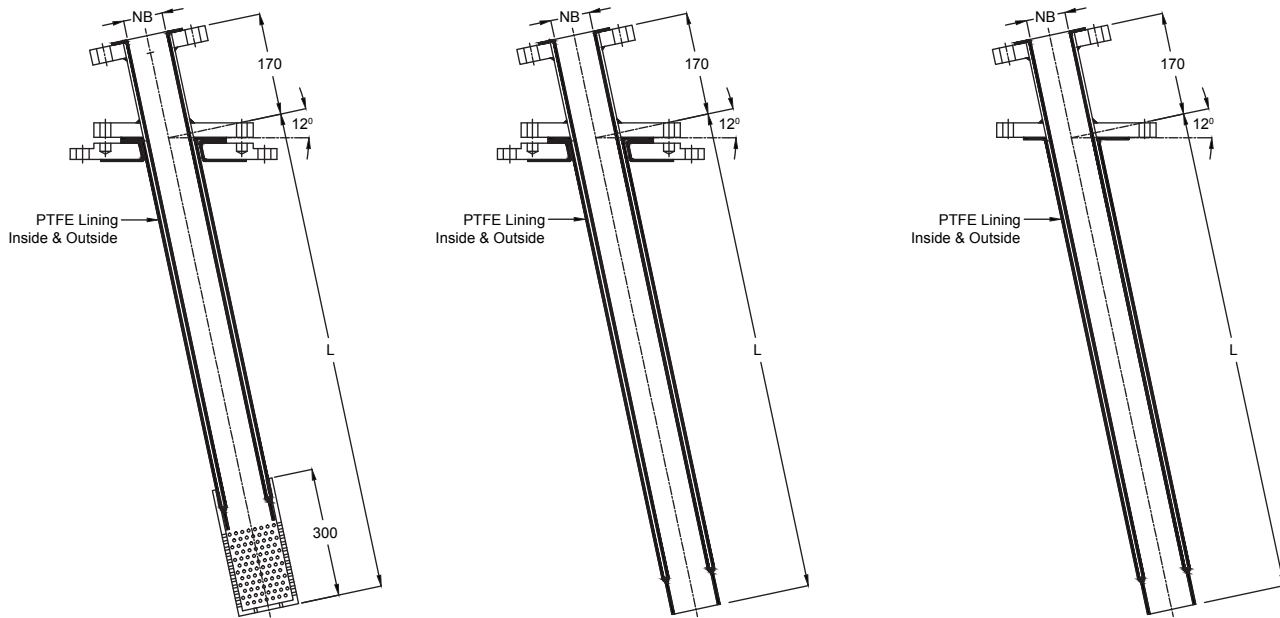

Dimension detail for Taper Dip Pipe			
Capacity (Liters)	Dip Pipe Size in NB	Nozzle Dia (MM)	Length (L) (MM)
160	25	80	650
250	25	80	800
500	40	100	850
630	40	100	1015
1000	50	200	1275
1600	50	200	1480
2000	50	200	1680
2500	50	200	1725
3000	50	200	1870
4000	50	250	2075
5000	50	250	2300
6300	50	250	2300

### Specification:

Body: Pipe Seamless CS / SS ASTM A106  
 Flange: IS 2062 / ASTM A105 Gr. B  
 Drilling Standard: ANSI B16.5 #150  
 Lining: PTFE (Inside & Outside)  
 Spark Test Internal : 10 Kv  
 Spark Test External : 5 Kv

Additional Specification:  
 Dip Pipe Angel : 12°

