


# LINED REDUCER & REDUCING FLANGE

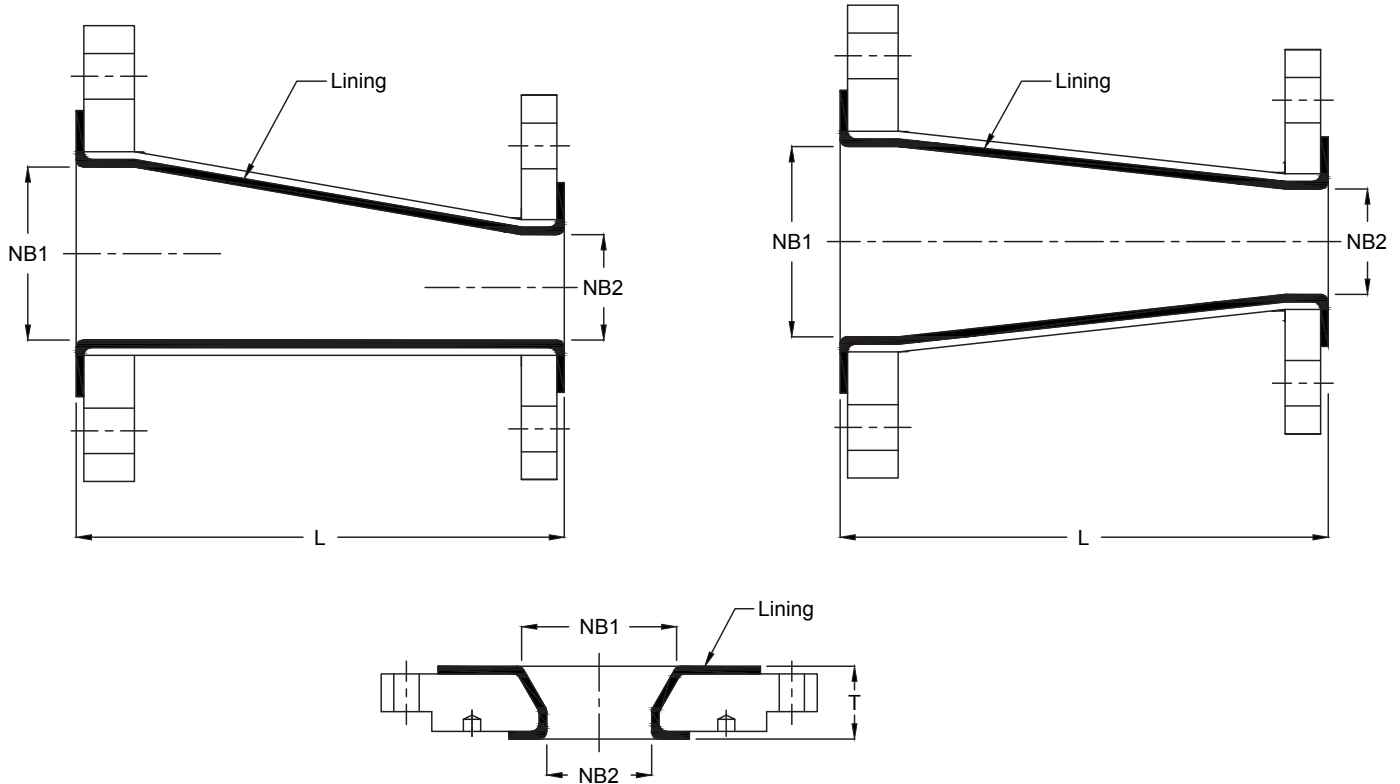

Dimension detail			
NB1	NB2	L	T
25	20	114	35
40	25	114	35
50	25	127	35
50	40	127	35
80	25	152	35
80	40	152	45
80	50	152	45
100	25	178	45
100	40	178	45
100	50	178	45
100	80	178	45
150	25	229	54
150	40	229	54

Dimension detail			
NB1	NB2	L	T
150	50	229	54
150	80	229	54
150	100	229	54
200	80	279	54
200	100	279	54
200	150	279	54
250	100	305	54
250	150	305	54
250	200	305	54
300	150	356	54
300	200	356	54
350	300	406	60

### Specification:

Body: • Ductile Iron GGG40.3 / ASTM A395  
 • Cast Steel ASTM A216 Gr. WCB /  
 ASTM A234 Gr. WPB  
 Flange: ANSI B16.5 / B16.42  
 Optional drilling standard on request:  
 DIN 2632 / 2633 BS 10 Table D,E,F  
 Face To Face: ANSI B16.5 #150  
 Lining: FEP / PFA / HDPE / PP / PVDF  
 Lining Thickness: 3mm to 6mm  
 Inspection & Testing: ASTM F1545-97  
 Hydraulic Test: 25 Kg/Cm<sup>2</sup>  
 Spark Test: 15 Kv

